



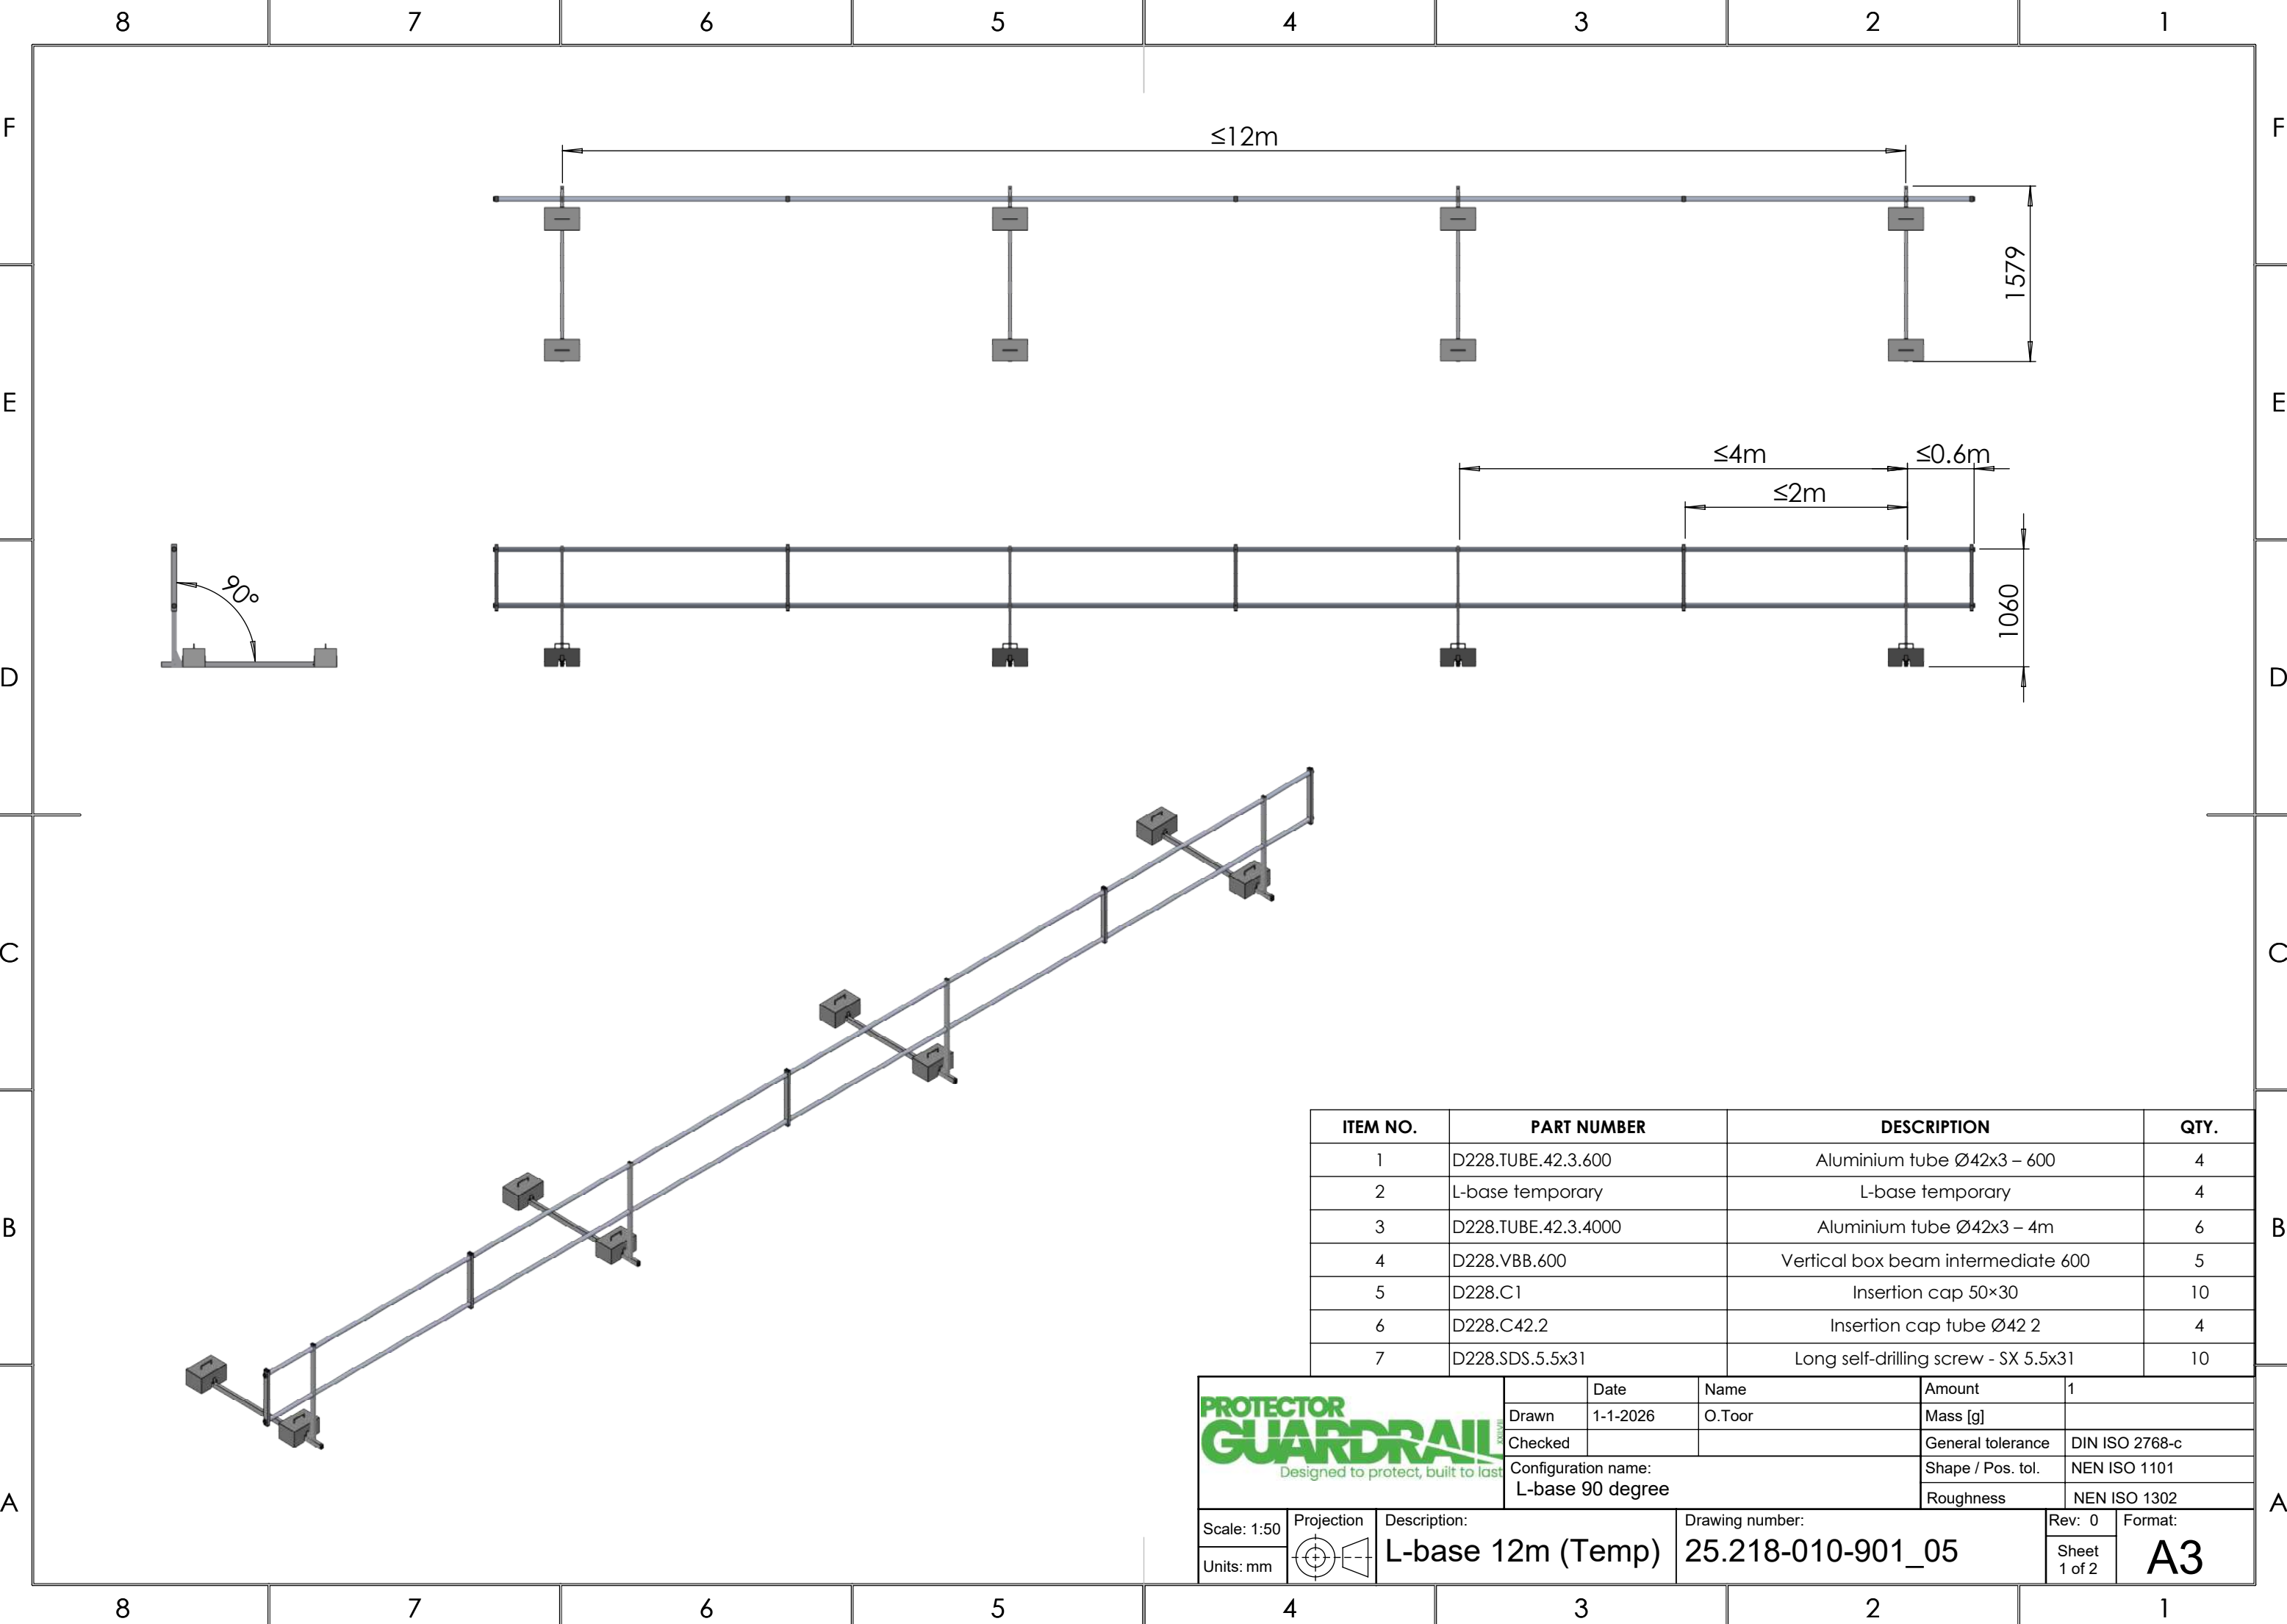

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	D228.TUBE.42.3.600	Aluminium tube Ø42x3 – 600	4
2	L-base temporary	L-base temporary	4
3	D228.TUBE.42.3.4000	Aluminium tube Ø42x3 – 4m	6
4	D228.VBB.600	Vertical box beam intermediate 600	5
5	D228.C1	Insertion cap 50×30	10
6	D228.C42.2	Insertion cap tube Ø42 2	4
7	D228.SDS.5.5x31	Long self-drilling screw - SX 5.5x31	10

PROTECTOR GUARDRAIL Designed to protect, built to last			Date	Name	Amount	1	
		Drawn	1-1-2026	O.Toor	Mass [g]		
		Checked			General tolerance	DIN ISO 2768-c	
		Configuration name: L-base 90 degree			Shape / Pos. tol.	NEN ISO 1101	
					Roughness	NEN ISO 1302	
Scale: 1:50	Projection	Description:		Drawing number:		Rev: 0	Format:
Units: mm		L-base 12m (Temp)		25.218-010-901_05		Sheet 1 of 2	A3

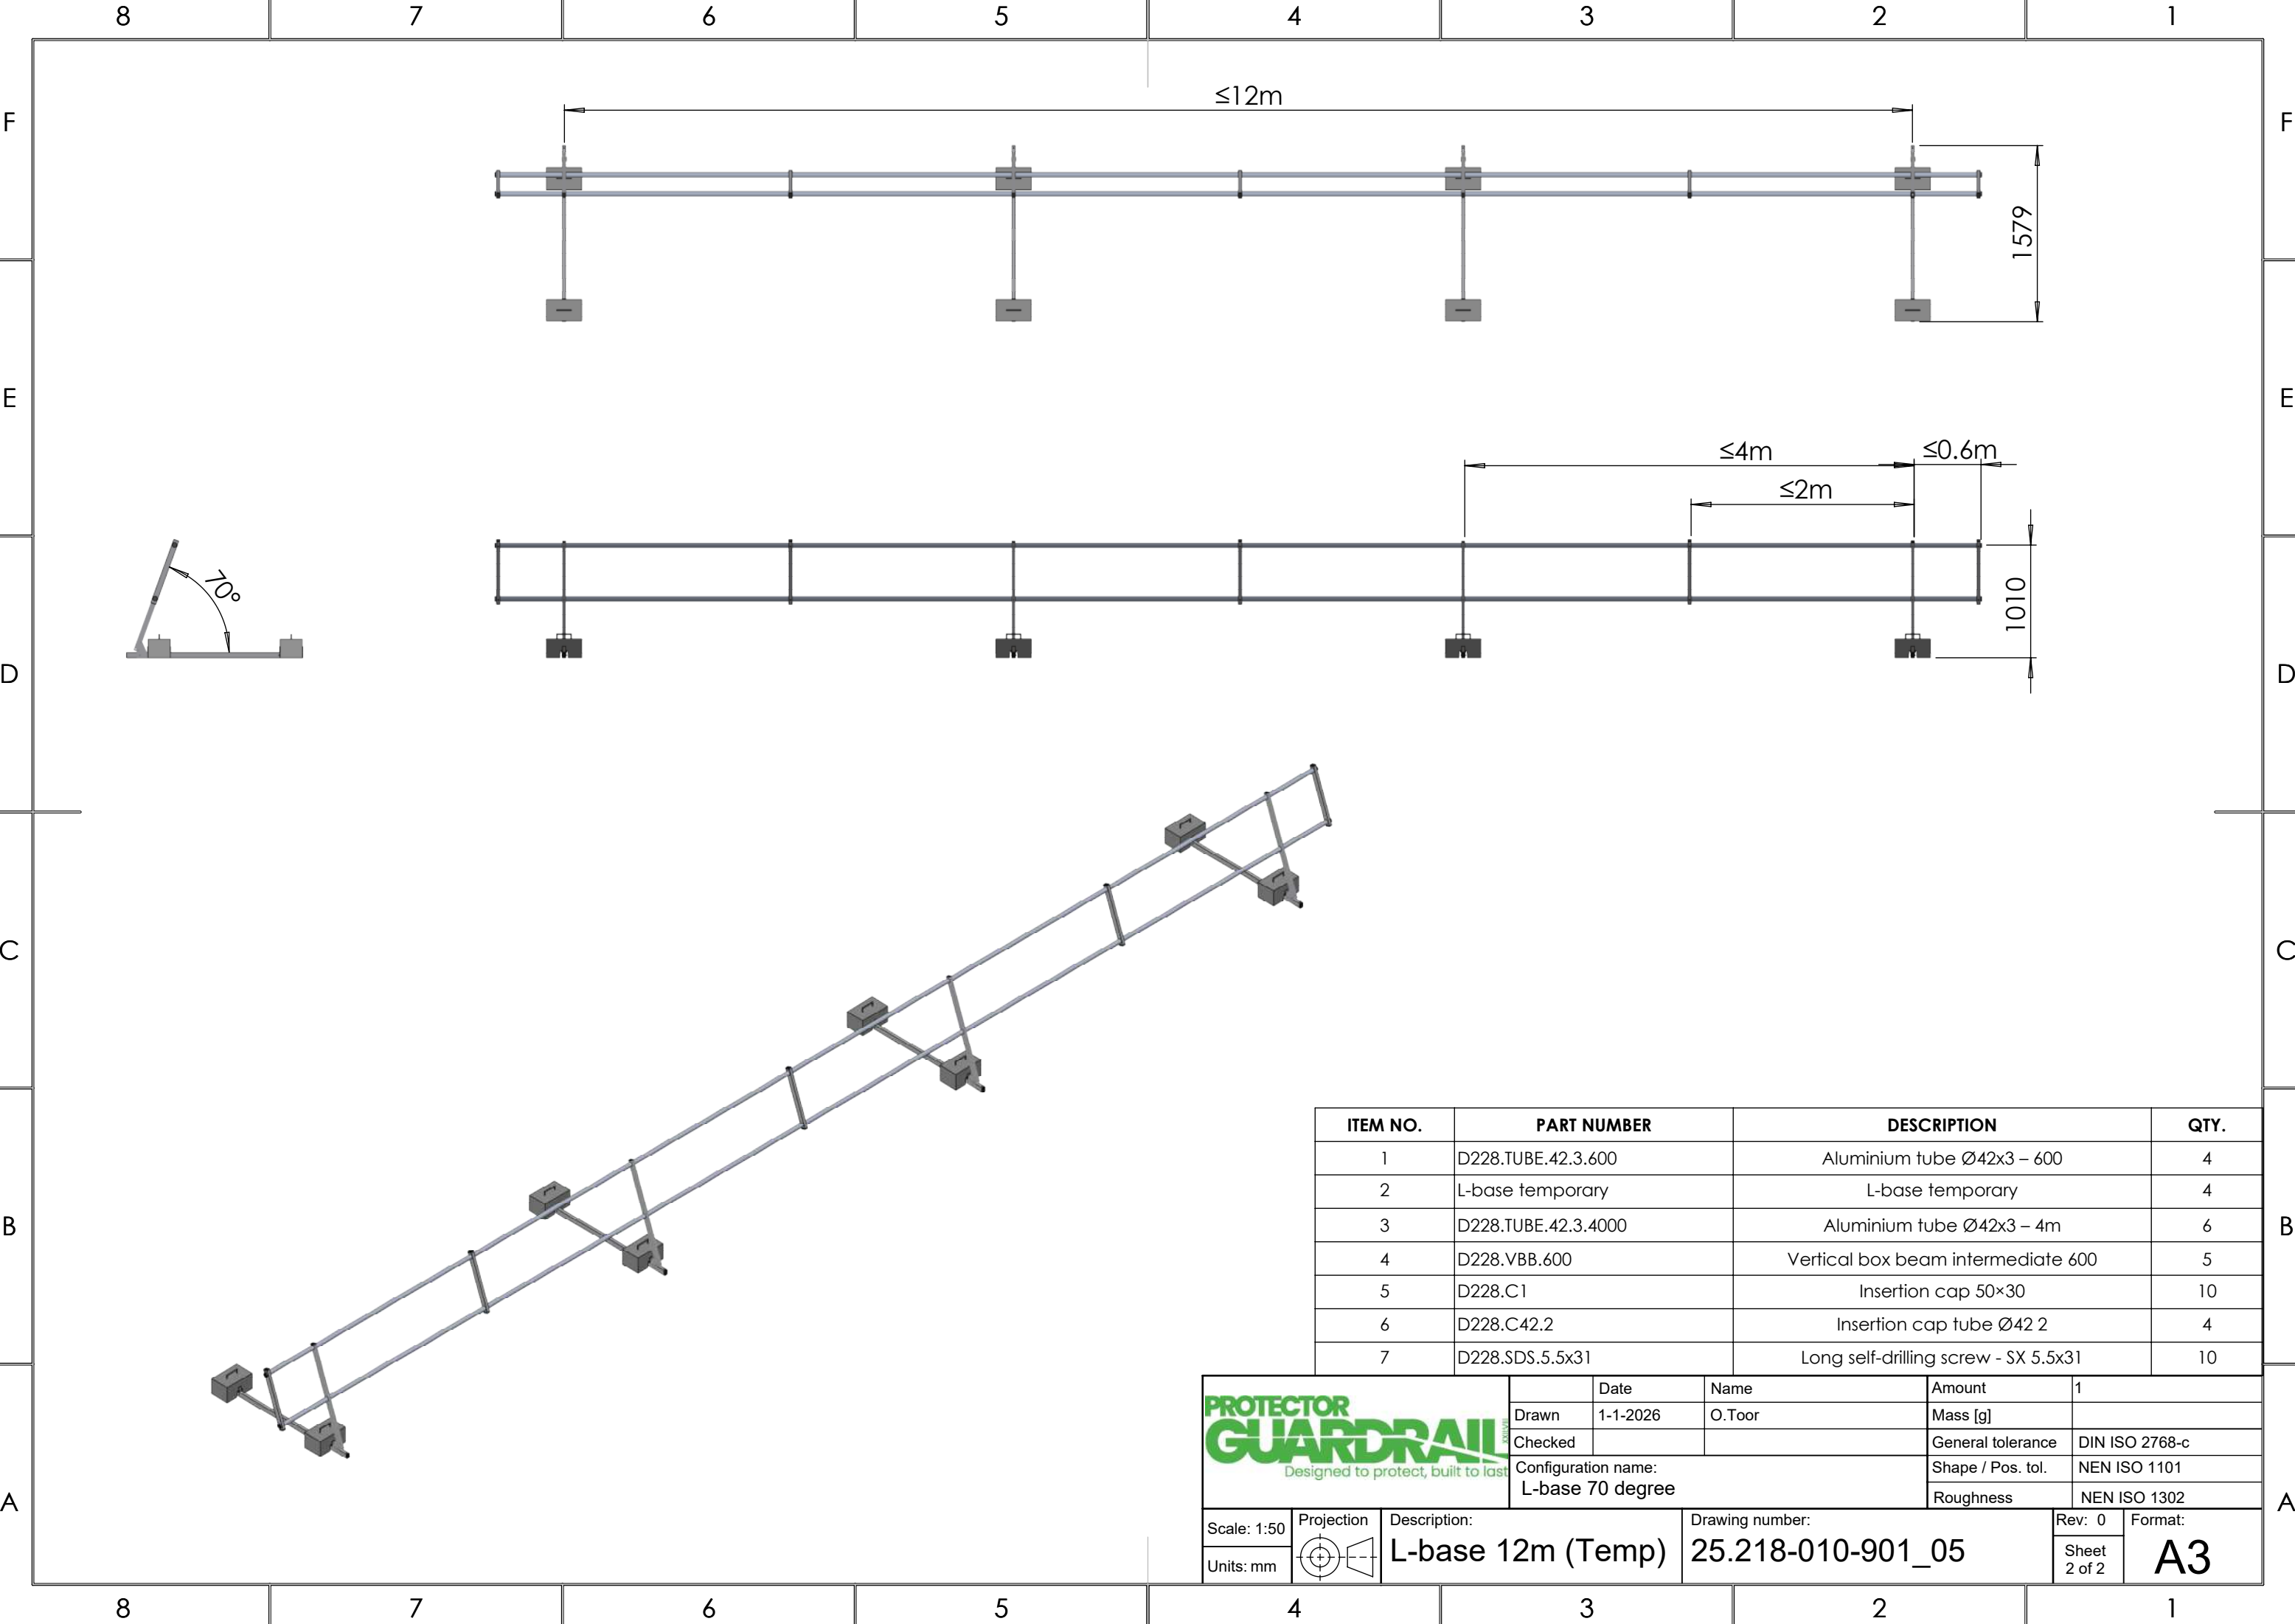

ITEM NO.	PART NUMBER	DESCRIPTION	QTY.
1	D228.TUBE.42.3.600	Aluminium tube Ø42x3 – 600	4
2	L-base temporary	L-base temporary	4
3	D228.TUBE.42.3.4000	Aluminium tube Ø42x3 – 4m	6
4	D228.VBB.600	Vertical box beam intermediate 600	5
5	D228.C1	Insertion cap 50×30	10
6	D228.C42.2	Insertion cap tube Ø42 2	4
7	D228.SDS.5.5x31	Long self-drilling screw - SX 5.5x31	10

PROTECTOR GUARDRAIL Designed to protect, built to last	Date		Name		Amount		1		
	Drawn		1-1-2026		O.Toor		Mass [g]		
	Checked						General tolerance		
							DIN ISO 2768-c		
		Configuration name: L-base 70 degree				Shape / Pos. tol.		NEN ISO 1101	
						Roughness		NEN ISO 1302	
Scale: 1:50		Projection		Description:		Drawing number:			
Units: mm				L-base 12m (Temp)		25.218-010-901_05			
						Rev: 0		Format:	
						Sheet 2 of 2		A3	